

CLASSIC STEEL
30-0 X 20-0 X 40-0 FULL-L RIGHT

PART#: ISK-SL-3040-24-STD

SURFACE AREA: (ft²): 937

PERIMETER: 135'-0"



DIVING/SLIDING EQUIPMENT SHALL BE DESIGNED FOR SWIMMING POOLS AND SHALL BE INSTALLED IN ACCORDANCE WITH THE DIVING/SLIDING EQUIPMENT MANUFACTURER'S SPECIFICATIONS. PLEASE CONTACT THE DIVING/SLIDING EQUIPMENT MANUFACTURER FOR THEIR SPECIFICATIONS.

DATE: 01/01/07

LINER AREA (ft²): 888


VOLUME (US Gal): 30,759

MEETS DEPTH AND SHAPE MINIMUM STANDARD ANS/INSP15-2003

DWG#: **CLSLS24S3040R07**

FULL-L

SHEET: 1 OF 2

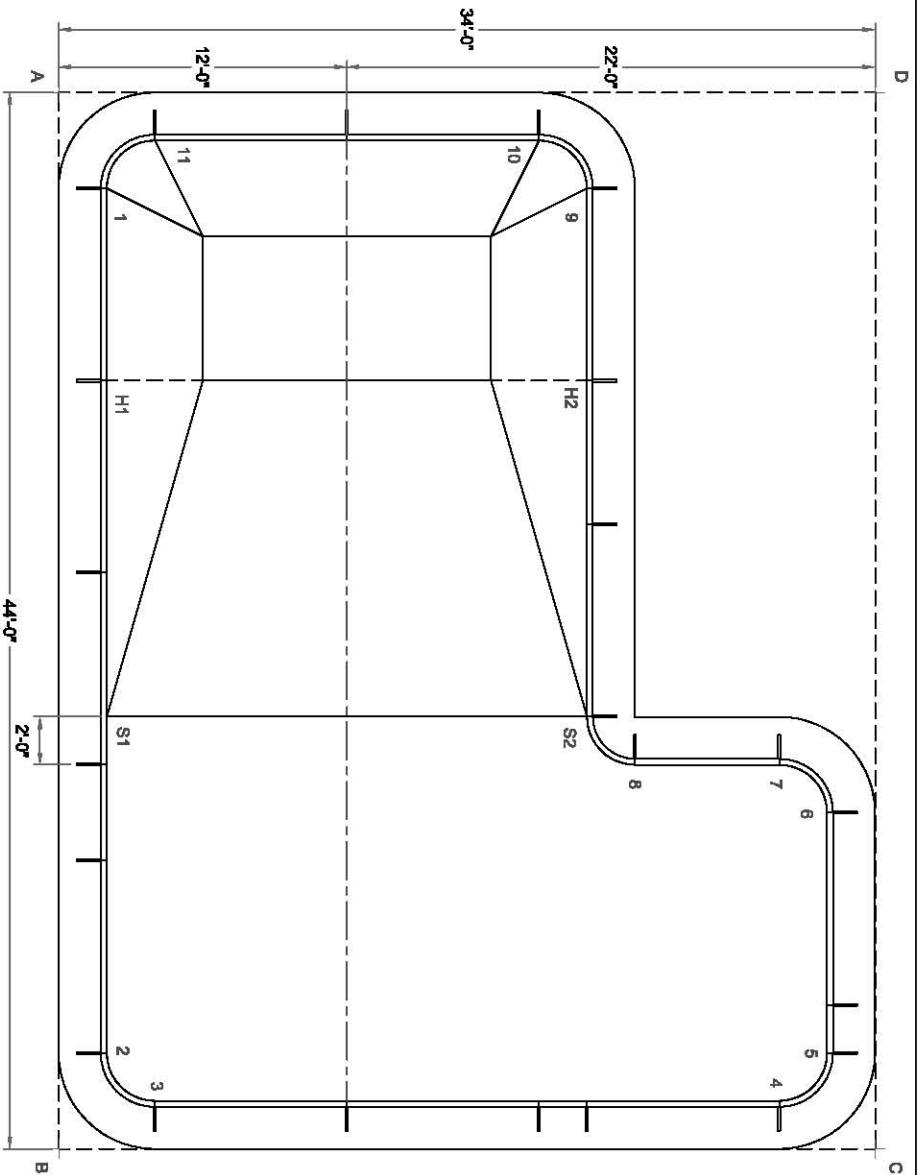

	A	B	C	D
1	4'-5 3/4"	40'-0 1/2"	51'-2 3/4"	32'-3"
2	40'-0 1/2"	4'-5 3/4"	32'-3"	51'-2 3/4"
3	42'-2 1/4"	4'-5 3/4"	30'-0 3/4"	51'-7 1/4"
4	51'-7 1/4"	30'-0 3/4"	4'-5 3/4"	42'-2 1/4"
5	51'-2 3/4"	32'-3"	4'-5 3/4"	40'-0 1/2"
6	43'-10 1/4"	34'-11 1/4"	14'-1 3/4"	30'-0 3/4"
7	41'-0 1/2"	34'-0"	16'-6"	28'-3 1/2"
8	36'-10 1/2"	28'-10 1/4"	18'-10 1/2"	29'-8 3/4"
9	22'-4 1/4"	45'-7 3/4"	41'-9 1/4"	12'-7 3/4"
10	20'-1 1/4"	46'-6 1/4"	44'-3 1/4"	14'-1 3/4"
11	4'-5 3/4"	42'-2 1/4"	51'-7 1/4"	30'-0 3/4"
S1	28'-1"	18'-1 1/4"	36'-8 1/2"	41'-2 3/4"
S2	34'-0 3/4"	28'-5"	21'-7 1/2"	28'-7 3/4"
H1	12'-2"	32'-0 3/4"	45'-3"	34'-2"
H2	25'-0 3/4"	38'-10"	34'-2"	16'-11 3/4"
A	-	44'-0"	55'-7 1/4"	34'-0"

DIAGONALS	NO	DESCRIPTION	STEP
1 TO 2	36'-0"	1 TO 2	1
1 TO 3	38'-0 3/4"	1 TO 3	1
1 TO 4	47'-2 1/2"	1 TO 4	8
1 TO 5	46'-10 1/4"	1 TO 5	2
1 TO 6	39'-8 1/2"	1 TO 6	2
1 TO 7	36'-10 1/2"	1 TO 7	2
1 TO 8	32'-6 3/4"	1 TO 8	1
1 TO 9	20'-0"	1 TO 9	3
1 TO 10	18'-1 1/4"	1 TO 10	1
1 TO 11	2'-10"	1 TO 11	5
1 TO S2	22'-0"	1 TO S2	5
1 TO S1	29'-8 3/4"	1 TO S1	1
1 TO H1	8'-0"	1 TO H1	23
1 TO H2	21'-6 1/2"	1 TO H2	24
2 TO 3	2'-10"	2 TO 3	2
2 TO 4	28'-0 3/4"	2 TO 4	2
2 TO 5	30'-0"	2 TO 5	2
2 TO 6	31'-7 1/2"	2 TO 6	2
2 TO 7	30'-5 1/2"	2 TO 7	2
2 TO 8	25'-0 3/4"	2 TO 8	2
2 TO 9	41'-2 1/4"	2 TO 9	14'-5"
2 TO 10	42'-0 1/2"	2 TO 10	37'-4 1/4"
2 TO 11	38'-0 3/4"	2 TO 11	39'-10 1/4"
2 TO S1	14'-0"	2 TO S1	47'-2 1/2"
2 TO S2	24'-5"	2 TO S2	33'-1 1/4"
2 TO H1	28'-0"	2 TO H1	17'-2 1/2"
2 TO 5	34'-5"	2 TO H1	41'-0 1/2"
3 TO 5	28'-0 3/4"	5 TO H2	29'-8 3/4"
3 TO 6	30'-5 1/2"	7 TO 8	6'-0"
3 TO 7	29'-6 1/4"	7 TO 9	25'-3 1/2"
3 TO 8	24'-5"	7 TO 10	27'-10 1/4"
3 TO 9	42'-0 1/2"	7 TO 11	36'-9 1/4"
3 TO 10	43'-1"	7 TO S1	28'-0 3/4"
3 TO 11	40'-0"	7 TO S2	8'-3"
3 TO S1	16'-1 1/2"	7 TO H1	32'-3"
3 TO S2	24'-1"	7 TO H2	17'-10 3/4"
3 TO H1	30'-0 3/4"	8 TO 9	24'-1"
3 TO H2	34'-11 3/4"	8 TO 10	26'-3 3/4"
4 TO 5	2'-10"	8 TO 11	32'-9 3/4"
4 TO 6	12'-2"	8 TO S1	22'-1"
4 TO 7	14'-0"	8 TO S2	2'-10"
4 TO 8	15'-2 3/4"	8 TO H1	27'-2 1/2"
4 TO 9	38'-10"	8 TO H2	16'-1 1/2"
4 TO 10	41'-2 3/4"	S1 TO S2	20'-0"
4 TO 11	47'-8 1/2"	S1 TO H1	14'-0"
4 TO S1	32'-3"	S1 TO H2	24'-5"
4 TO S2	17'-10 3/4"	S2 TO H1	24'-5"
4 TO H1	41'-0 1/2"	S2 TO H2	14'-0"
4 TO H2	31'-0 1/2"	H1 TO H2	20'-0"

DIAGONALS	NO	DESCRIPTION	STEP
8'-0" STRAIGHT - HS10850M	1	1	1
8'-0" STRAIGHT - PLAN	9	8	8
8'-0" STRAIGHT - HR	2	2	2
8'-0" STRAIGHT - PLAN	2	2	2
4'-0" STRAIGHT - PLAN	1	1	1
2'-0" STRAIGHT - PLAN	2	3	1
1'-0" STRAIGHT - PLAN	-	2	-
3/2" X 2" Ø RADIUS 90° CORNER	5	5	5
3/2" X 2" Ø REV RAD 90° CORNER	1	1	1
A-FRAME	23	24	24
HARDWARE STRAIGHT 150 PACK	2	2	2
REBAR STAGE 18 IN. (25 PACK)	2	2	2
OPTIONAL DECK SUPPORT	50	49	49