

CLASSIC STEEL
20-0 X 22-3 X 39-11 JAMAICA RIGHT

PART#: ISK-MS-2040-24-STD
 DATE: 01/01/07

SURFACE AREA (ft²): 770
 PERIMETER: 114'-6"
 LINER AREA (ft²): 798
 VOLUME (US Gal): 25,277

SCALE: 1/8" = 1'-0"

SFTY COVER AREA (ft²): 1016
 VOLUME (Litres): 95,694




DIVING/SLIDING EQUIPMENT SHALL BE DESIGNED FOR SWIMMING POOLS AND SHALL BE INSTALLED IN ACCORDANCE WITH THE DIVING/SLIDING EQUIPMENT MANUFACTURER'S SPECIFICATIONS. PLEASE CONTACT THE DIVING/SLIDING EQUIPMENT MANUFACTURER FOR THEIR SPECIFICATIONS.

MEETS DEPTH AND SHAPE MINIMUM STANDARD ANS/SP15-2003



DWG#: **CLMS24S2040R07**

SHEET: 1 OF 2

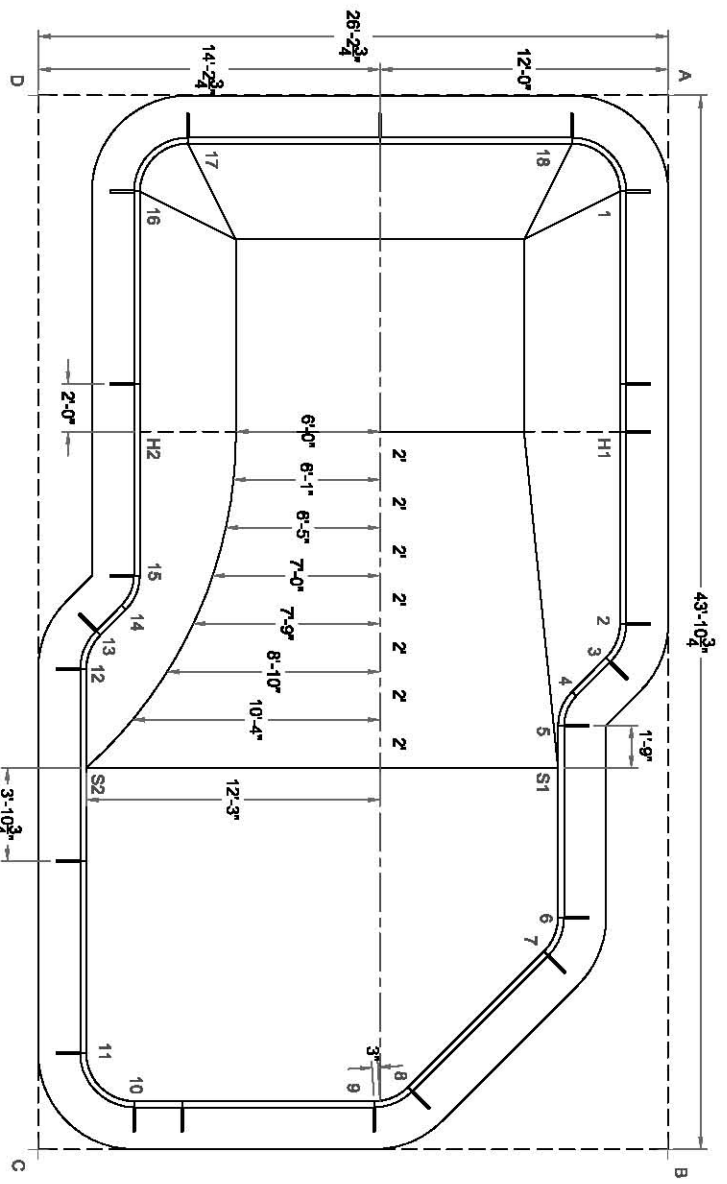

	A	B	C	D
1	4'-5 3/4"	39'-11 1/4"	48'-8"	24'-6 3/4"
2	22'-1"	21'-11 3/4"	32'-7 3/4"	32'-8 3/4"
3	23'-6 3/4"	20'-7 3/4"	31'-3 1/4"	33'-3 1/4"
4	25'-1 3/4"	19'-5 3/4"	29'-3 1/2"	33'-4"
5	26'-7 3/4"	18'-2 3/4"	27'-11 1/4"	34'-0 1/4"
6	34'-6 1/2"	10'-8 1/4"	23'-8 1/2"	40'-6 1/4"
7	36'-0 1/4"	9'-8 3/4"	22'-7 1/2"	41'-4 3/4"
8	42'-8 1/2"	11'-1 1/2"	15'-7 1/2"	44'-1"
9	43'-7 3/4"	12'-4 3/4"	14'-1 1/2"	44'-2"
10	47'-5"	22'-3 3/4"	4'-5 3/4"	42'-1"
11	46'-8"	24'-6 3/4"	4'-5 3/4"	39'-11 1/4"
12	34'-0 1/4"	31'-5"	20'-1 1/4"	23'-11 3/4"
13	32'-7 1/2"	31'-10 3/4"	21'-6 3/4"	22'-7 1/2"
14	31'-1 1/2"	31'-10 1/4"	22'-9 1/4"	21'-8 3/4"
15	29'-8 3/4"	32'-5 3/4"	24'-3 1/4"	20'-5 1/4"
16	22'-4 1/4"	45'-6 3/4"	40'-1 1/4"	5'-10"
17	20'-1 1/4"	46'-5"	42'-4 1/4"	6'-6 1/2"
18	4'-5 3/4"	42'-1"	47'-5"	22'-3 3/4"
S1	28'-4 1/2"	16'-6 1/2"	26'-10 1/4"	35'-4 3/4"
S2	37'-0 1/4"	28'-11 3/4"	16'-0 1/4"	28'-0 3/4"
H1	14'-1 3/4"	29'-11 1/2"	38'-5 3/4"	27'-11 3/4"
H2	26'-1"	37'-1 1/4"	30'-2 1/4"	14'-7 1/2"
A	-	43'-10 3/4"	51'-1 1/2"	26'-2 3/4"

	DIAGONALS
1 TO 3	19'-5"
1 TO 4	20'-11"
1 TO 5	22'-4 3/4"
1 TO 6	30'-4 1/4"
1 TO 7	31'-9 3/4"
1 TO 8	38'-4"
1 TO 9	39'-3"
1 TO 10	42'-11 1/2"
1 TO S1	24'-1 3/4"
1 TO S2	32'-8 1/2"
1 TO H1	10'-0"
1 TO H2	22'-4 1/4"
2 TO 3	1'-6 1/4"
2 TO 4	3'-5 1/2"
2 TO 5	4'-11 1/2"
2 TO 6	12'-6 1/4"
2 TO 7	14'-0"
2 TO 8	21'-2 3/4"

	DIAGONALS
2 TO 9	22'-4 1/2"
2 TO 10	28'-4 1/2"
2 TO S1	6'-6 1/2"
2 TO S2	23'-0 1/4"
2 TO H1	8'-0"
2 TO H2	21'-6 1/2"
3 TO 5	3'-5 1/2"
3 TO 6	11'-0 1/4"
3 TO 7	12'-6"
3 TO 8	19'-8 1/4"
3 TO 9	20'-10 1/4"
3 TO 10	26'-11 1/2"
3 TO S1	5'-0"
3 TO S2	22'-1 1/2"
3 TO H1	9'-5 1/4"
3 TO H2	21'-7"
6 TO 8	9'-5"
6 TO 9	10'-9 3/4"
6 TO 10	19'-2 3/4"
6 TO S1	6'-3"
6 TO S2	20'-7 1/4"
6 TO H1	20'-5"
6 TO H2	26'-8 1/2"
7 TO 8	8'-0"
7 TO 9	9'-5 1/4"
7 TO 10	18'-2"
7 TO S1	7'-8"
7 TO S2	20'-6 1/2"
7 TO H1	21'-10 1/2"
7 TO H2	27'-5"
8 TO 9	1'-6 1/4"
8 TO 10	11'-5"
8 TO S1	14'-8 1/4"
8 TO S2	18'-10 1/2"
8 TO H1	28'-8 1/4"
8 TO H2	29'-6"
9 TO 10	10'-0"
9 TO S1	15'-10 1/4"
9 TO S2	18'-4 1/4"
9 TO H1	29'-8 1/2"
9 TO H2	29'-6 1/2"
11 TO 12	16'-0"
11 TO 13	17'-5"
11 TO 14	18'-6 1/2"
11 TO 15	20'-0 1/4"

DESCRIPTION	NO	6"	8"
8'-0" STRAIGHT - HS10850M	1	1	1
8'-0" STRAIGHT - PLAN	8	7	7
8'-0" STRAIGHT - HR	2	2	2
2'-0" STRAIGHT - PLAN	3	4	2
1'-6" STRAIGHT - PLAN	1	1	1
1'-0" STRAIGHT - PLAN	-	-	2
3'-2" X 2' 0" RADIUS 90° CORNER	3	3	3
1'-7" X 2' 0" RADIUS 45° CORNER	4	4	4
1'-7" X 2' 0" REV RAD 45° CORNER	2	2	2
A-FRAME	22	23	23
HARDWARE STRAIGHT 160 PACK	2	2	2
REBAR STAKE 18 IN. (25 PACK)	2	2	2
OPTIONAL DECK SUPPORT	44	43	43

	DIAGONALS
11 TO 16	35'-11 1/2"
11 TO 17	38'-1 1/2"
11 TO 18	42'-11 1/2"
11 TO S1	22'-11 1/2"
11 TO S2	11'-10 3/4"
11 TO H1	34'-1 1/2"
11 TO H2	25'-11 3/4"
12 TO 13	1'-6 1/4"
12 TO 14	2'-11 3/4"
12 TO 15	18'-6 1/2"
12 TO 16	20'-9 1/2"
12 TO 17	22'-3 1/2"
12 TO 18	29'-9 3/4"
12 TO S1	20'-0 3/4"
12 TO S2	4'-1 1/4"
12 TO H1	24'-4"
12 TO H2	10'-1 3/4"
13 TO 14	1'-6"
13 TO 15	2'-11 3/4"
13 TO 16	18'-6 1/2"
13 TO 17	20'-9 1/2"
13 TO 18	28'-4 1/2"
13 TO S1	19'-10 1/4"
13 TO S2	5'-6 3/4"
13 TO H1	23'-3"
13 TO H2	8'-7 1/2"
S1 TO S2	19'-7 3/4"
S1 TO H1	14'-2 3/4"
S1 TO H2	22'-4 1/4"
S2 TO H1	26'-3 1/4"
S2 TO H2	14'-2"
H1 TO H2	20'-0"